CAN-BUS EMULATOR


USER MANUAL

LIEBHERR (ECU 3) EMULATOR INSTALLATION

EURO 6




www.canbusemulator.com
+90 530 937 46 36
eranakarsubasi

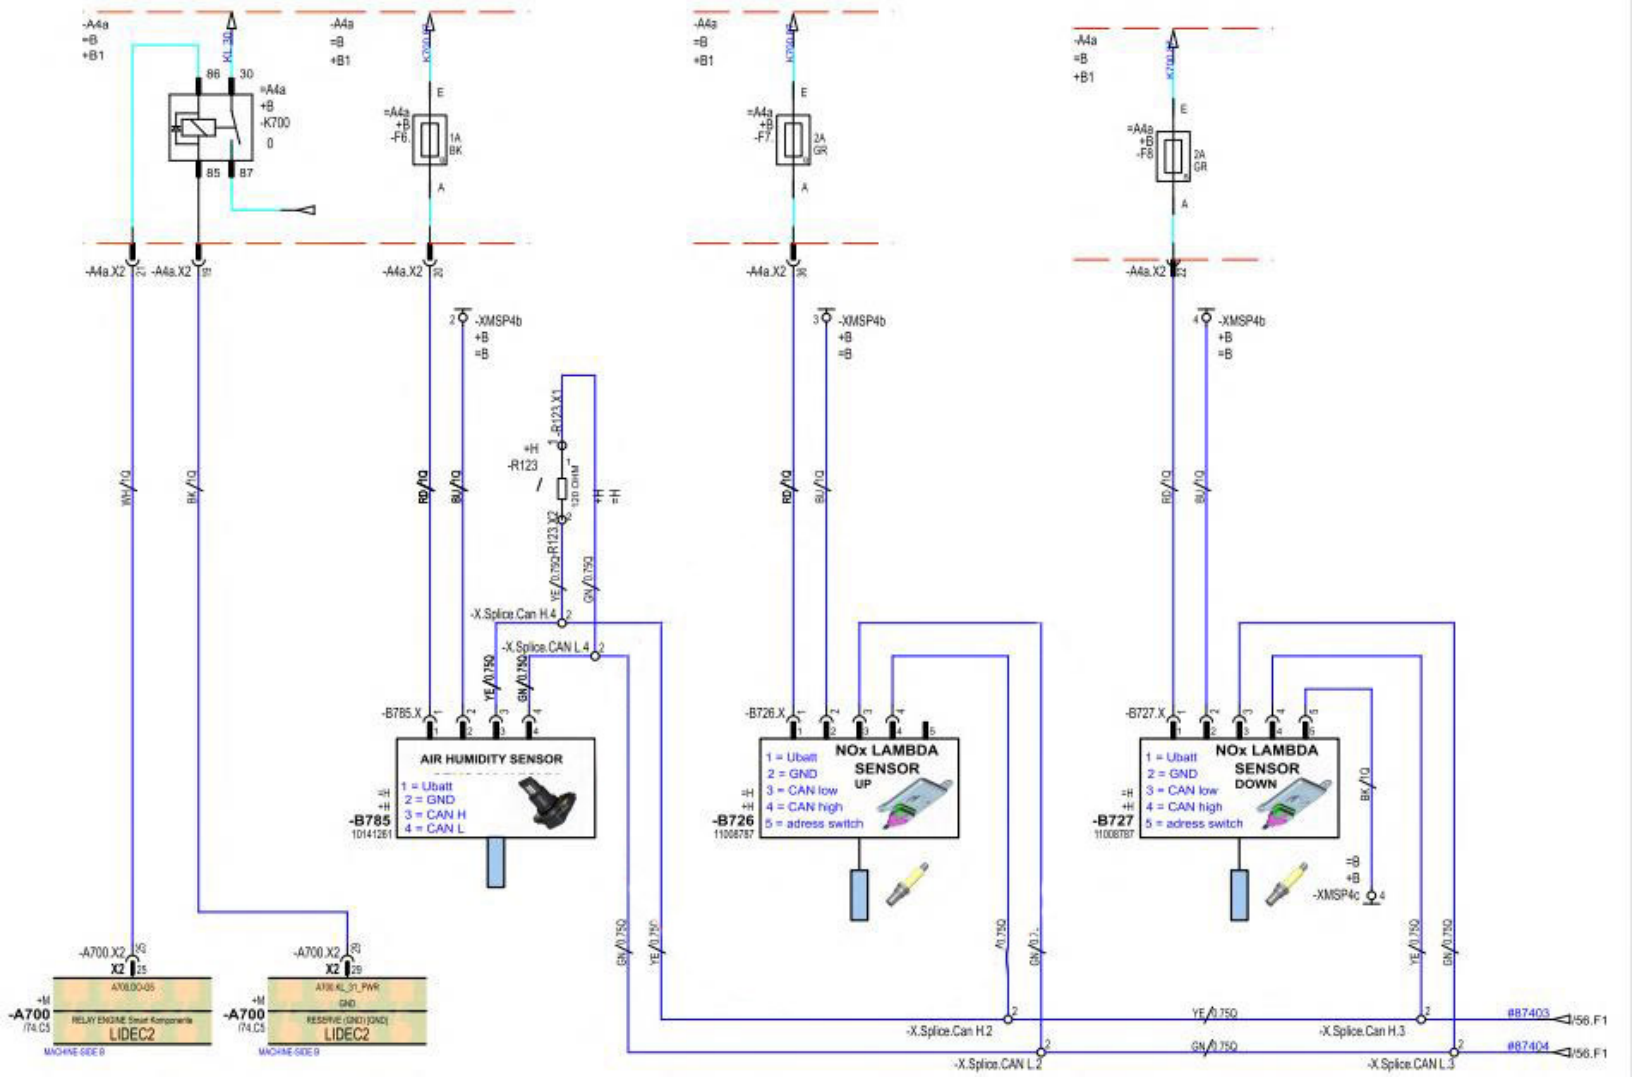
-A4a
=B
+B1
K1, 30
86
30
=A4a
+B
-K700
0
85
87
E
=A4a
+B
-F6
1A
BK
A
-A4a.X2
-XMSP4b
+B
=B
+H
-R123
120 OHM
-R123.X1
-R123.X2
-X.Splice.Can H.4
-X.Splice.CAN L.4
-B785.X
AIR HUMIDITY SENSOR
1 = Ubatt
2 = GND
3 = CAN H
4 = CAN L
-B785
10141261
-B726.X
NOx LAMBDA SENSOR UP
1 = Ubatt
2 = GND
3 = CAN low
4 = CAN high
5 = adress switch
-B726
11008787
-B727.X
NOx LAMBDA SENSOR DOWN
-B727
11008787
-XMSP4c
-A700.X2
X2
-A700
/74.C5
LIDEC2
MACHINE SIDE B
-X.Splice.Can H.2
-X.Splice.CAN L.2
-X.Splice.Can H.3
-X.Splice.CAN L.3
#87403
#87404
/56.F1

LIEBHERR EMULATOR INSTALLATION

You need to remove the Output NOx Sensor (B727x), NH3 sensor (B783X), A776.X2 socket, A776 .X3 socket , A776 .X4 socket and Adblue Level sockets.
NOTE: Do not remove any fuses.

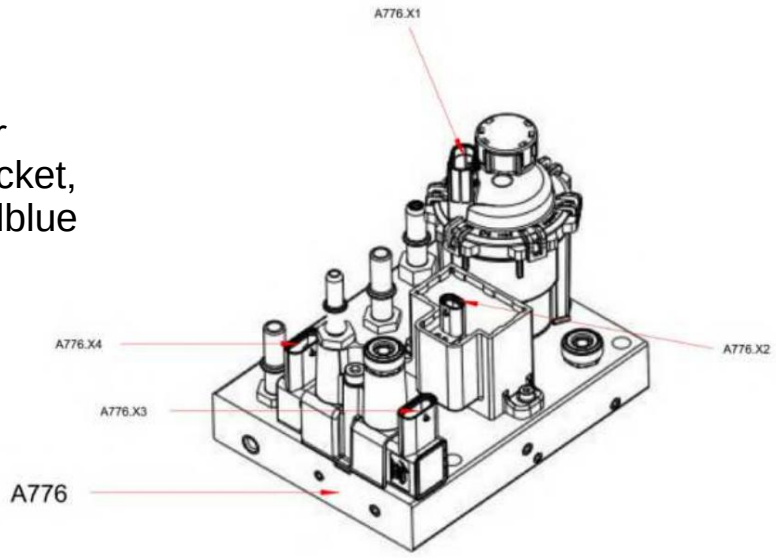

A776.X3 A776.X4

Adblue Level Sensor

A776.X2



LIEBHERR EMULATOR INSTALLATION




NH3 Sensor



NH3 Sensor

LIEBHERR EMULATOR INSTALLATION



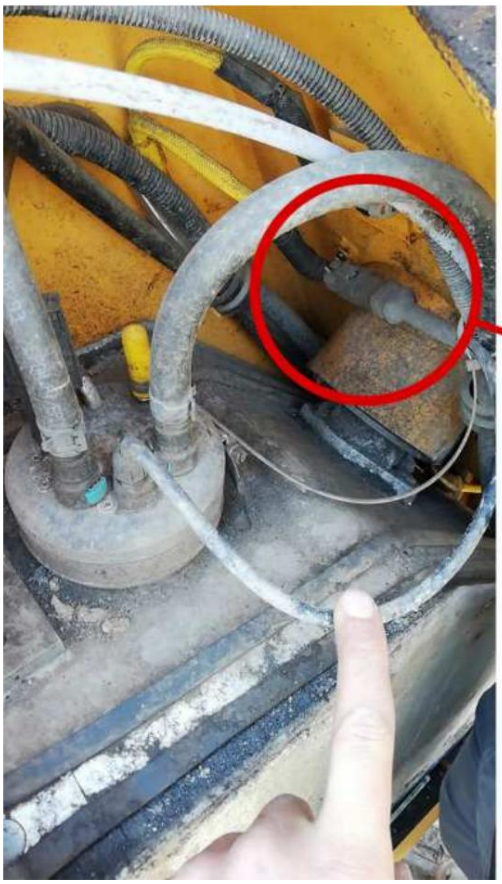

Adblue Level Sensor



Adblue Level Sensor